

***Before you begin!***

It is important to install each bracket with bolts 1 and 2 on opposite sides of the main uprights. This prevents anti-tipping legs from rotating out of correct alignment with floor.

1.

Start on a level flooring surface. Slide the bracket up from the bottom of the chair into the position shown. Tighten bolts 1 and 2 until brackets are snug against frame.


2.

Determine desired distance of legs from floor. (A) We have provided a 1" thick foam block as a gauge. This distance provides clearance while allowing minimal rear tipping. If a different height is desired, stacking books will work well.

3.

Place gauge on floor. With wheel resting on the gauge, firmly tighten bolts 1, 2, 3 and 4 on the bracket. Repeat procedure for opposite side.

Check bolts periodically for tightness.

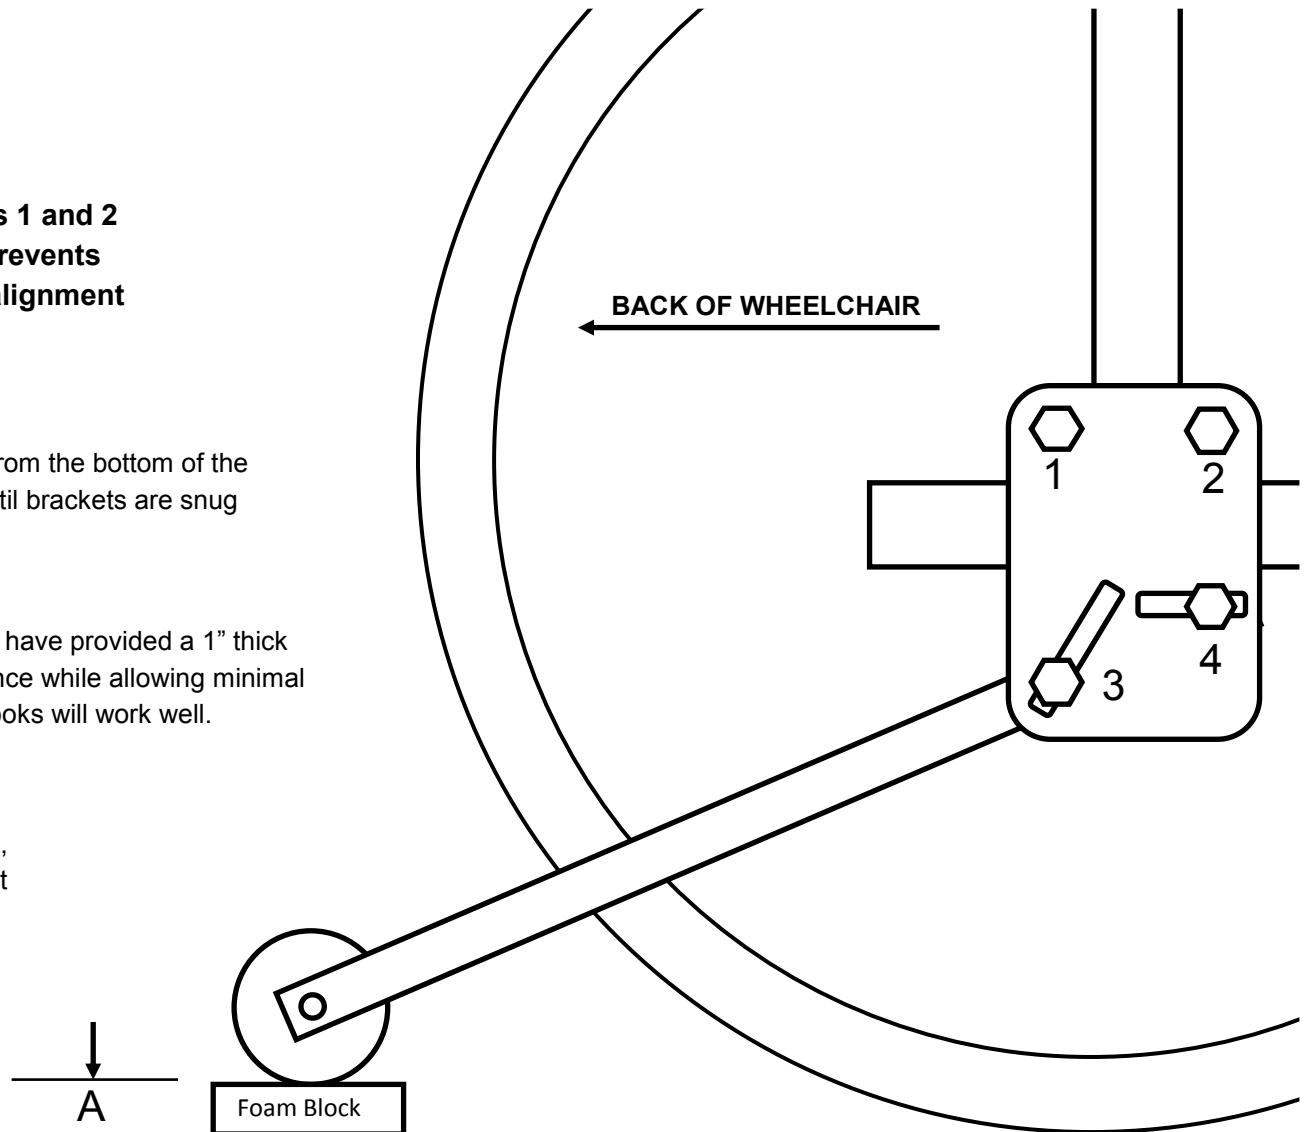

**Phone: 800-323-4282**

**Fax: 800-950-1167**



Like us on Facebook at:  
[www.facebook.com/ALCOSalesServiceCo](http://www.facebook.com/ALCOSalesServiceCo)



Follow us on Twitter at:  
[www.twitter.com/ALCOSales](http://www.twitter.com/ALCOSales)

**info@alcosales.com**

**www.alcosales.com**